

390 SERIES

Marker #ECVML391(x)

(x) = **Y** **R**



Benefits

- Specially engineered lens to boost light output & brightness
- Sonic welded, waterproof construction
- Lens w/ UV inhibitor prevents sun fade

520 Series

- Narrow design sets flush against the vehicle
- LED OEM & replacement marker light is designed to fit IC school buses
- Optional Fat Gasket allows surface mounting on any location for non-IC vehicles
- P2 rated combination clearance & marker lights are perfect for bus front & rear corner mounting
- Sleek, chrome bezel available to complement other lighting & accessories
- Light includes neoprene gasket, mounting hardware & 5" two-wire leads w/ attached Delphi 150 Series Metri-pack connector

520 Premium

- Same benefits as the standard 520 Series w/ a greater number of LEDs (our brightest light)
- P2 rated combination clearance & marker lights are perfect for bus front & rear corner mounting

520 RD Series


- Same benefits as the standard 520 Series w/ a budget friendly, lower price

390 Series

- PC/P2 rated marker light is perfect for front & rear corner mounting on buses
- Light can be surface mounted or used as an LED retrofit for incandescent lights when used w/ the optional Mounting Base
- Light includes neoprene gasket, mounting hardware & 7" two-wire leads w/ .180 molded bullets

390 ACCESSORIES

Black Mounting Base #ECVML39BMB

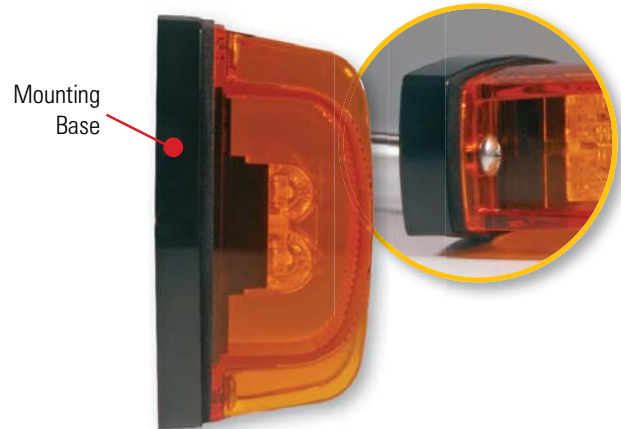

Bus Installations



520 PREMIUM SERIES

Marker #ECVMLDP1(x)
w/ Fat Gasket #ECVMLDP2(x)

(x) = **Y** **R**



Fat Gasket

Delphi
Metri-pack
Connector



520 RD SERIES

Marker #ECVMLDP1(x)-RD


(x) = **Y** **R**



520 ACCESSORIES

Chrome Bezel #ECVMLDP1CB

Chrome Bezel

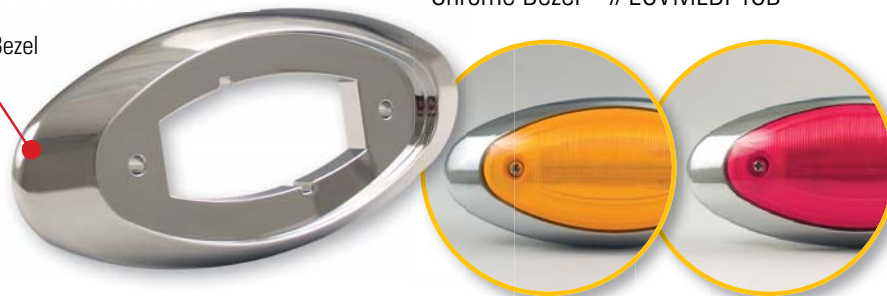

LED MARKER/CLEARANCE
390 Series | 520 Premium & RD Series

Tech Specs	390 Series	520 Premium & RD Series
Input Voltage:	10 - 16 Vdc	10 - 16 Vdc
Current Consumption:	@ 12.8 Vdc 0.08 amps	@ 12.8 Vdc Premium: 0.06 amps RD: 0.05 amps
LEDs:	4 Gen2	Premium: 6 Gen2 RD: 1 Gen2
Mounting:	Surface Mount on 3.25" (83 mm) centers	Surface Mount on 3.75" (95 mm) centers
Dimensions:	3.8" (97 mm) length x 1.54" (39 mm) width x 1.48" (38 mm) depth	5" (127 mm) length x 2.31" (59 mm) width x 0.875" (22 mm) depth w/ Fat Gasket 1.63" (41 mm) depth

SoundOFF Signal
www.soundoffsignal.com
616.896.7100 / 800.338.7337