


# HALOGEN ROTATOR SCHEMATIC

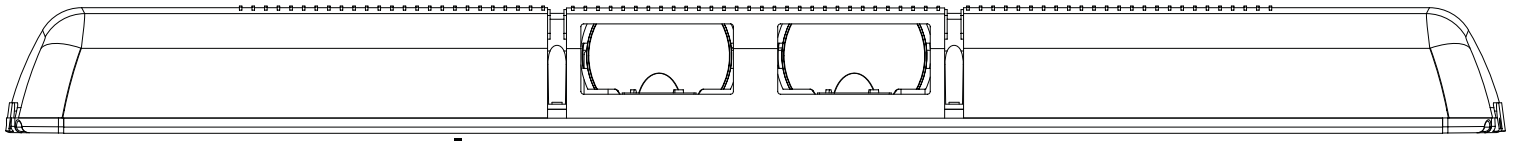

Function	In-line fuse requirement	Wire Color
Takedown - Driver Side	10 Amp	Blue
Takedown - Passenger Side	10 Amp	Blue/Blk
Alley Light - Driver Side	7.5 Amp	Yellow
Alley Light - Passenger Side	7.5 Amp	Yellow/Blk
Rotator 1 - Driver Side (Outer)	10 Amp	Red
Rotator 2 - Driver Side (Inner)	10 Amp	Red/Blk
Rotator 3 - Center	10 Amp	White
Rotator 4 - Passenger Side (Inner)	10 Amp	Grey
Rotator 5 - Passenger Side (Outer)	10 Amp	Orange

**WARNING: ALL WIRES MUST BE FUSED TO ENSURE PROTECTION IN THE EVENT A SHORT CIRCUIT OR OVERLOAD CONDITION OCCURS. REFER TO CHART INCLUDED WITH WIRE SCHEMATIC FOR PROPER FUSE RATING.**

Black

GROUND

**SoundOff  
Signal** |||||



At anytime during your installation process, feel free to call our technical assistance line at 1-800-338-7337. You can also visit our website at [www.soundoffsignal.com](http://www.soundoffsignal.com) or email technical assistance at [techsupport@soundoffsignal.com](mailto:techsupport@soundoffsignal.com).