

4500 SERIES LED

#ELB(xx)B(x)(xx)(xx)

C **M** **H** **C**
L **O** **E** **O**
A **M** **H** **L**
S **O** **E** **L**
S **N** **I** **T**

CLASS

45=Class 1
42=Class 2

MOUNT

C=Flat/Pipe
M=Magnetic

HEIGHT

Magnetic Mount:
L+=Low, 4" dome
H+=High, 6" dome
Flat/Pipe:
LØ=Low, 4" dome
HØ=High, 6" dome

COLOR

LED COLOR / DOME COLOR

- A** AA=Amber/Amber
- A** AC=Amber/Clear
- W** WA=White/Amber
- B** BB=Blue/Blue
- G** GG=Green/Green
- R** RR=Red/Red
- W** WC=White/Clear
- J** Red/Blue Split (J in low dome only)

4500 LED ECE65 CERTIFIED

6" Dome - Magnetic Mount
#ELB48BMH+AA Amber
#ELB48BMH+BB Blue
6" Dome - Flat/Pipe Mount
#ELB48BCHØAA Amber
#ELB48BCHØBB Blue



| Tech Specs | 4500 LED |
|-----------------|--|
| Input Voltage: | 10 - 30 Vdc |
| Current Draw: | 1 amp @ 12 Vdc 0.5 amps @ 24 Vdc |
| Output: | Amber, Blue, Green, White: 9 watts Red: 6 watts |
| Technology: | 12 Gen3 LEDs |
| Flash Patterns: | 8 Flash Patterns |
| Mounting: | Permanent or Magnetic Mount |
| Dimensions: | 4" Dome w/ base: 5" (12 cm) H 6" Dome w/ base: 6.8" (17 cm) H 6.3" (16 cm) Base Diameter |



Features

- Magnetic or Permanent Mount (5000 not available in Magnetic Mount)
- Two Dome Heights - 4" & 6"
- May be pipe mounted
- Lens with UV inhibitor prevents sun fade
- Optional Branch Guard & Dust Cover (for CA Title 13 compliancy for 3000, 4000 or 4500)

4500 Series LED

- 1300 Lumen LED output
- Rated to last 20,000+ hours
- Heavy duty cast aluminum base
- Same footprint as our 3000 & 4000 for easy upgrade option
- 5 Year Warranty
- SAE J845 Class 1 & Class 2 certified

3000 Series Strobe

- 10 or 20 watt Strobe models available
- May be ordered as Remote or Self-contained units
- Rugged polycarbonate base
- Advanced circuitry designed tolerate high vibration applications
- 2 Year Warranty (strobe tube 1 year)
- SAE J845 Class 2 certified

4000 Series Strobe

- 20 watt Strobe model available
- Heavy duty cast aluminum base
- Advanced circuitry designed tolerate high vibration applications
- 2 Year Warranty (strobe tube 1 year)
- SAE J845 Class 2 certified

5000 Series Strobe

- 15 watt Strobe model available
- Permanent mount only
- Heavy duty cast aluminum base
- Advanced circuitry designed tolerate high vibration applications
- 1 Year Warranty
- SAE J845 Class 2 certified

3000 SERIES STROBE

#3(xx)(x)(x)(x)(x)
W **F** **H** **M** **C**
A **L** **E** **O** **L**
T **A** **I** **U** **L**
S **H** **S** **T** **R**

WATTS

3000: ØØ=Remote,
 1Ø=10 watt, 2Ø=20 watt
 (4000 is 20 watt)

FLASH

3000: Ø=Remote,
 7=Double & Quad
 (4000 has Double & Quad)

4000 SERIES STROBE

#4227(x)(x)(x)
H **M** **C**
E **O** **L**
I **U** **L**
S **T** **R**

HEIGHT

L=Low, 4" dome
 H=High, 6" dome

MOUNT

C=Flat/Pipe
 M=Magnetic

COLOR

A Amber Lens
B Blue Lens
C Clear Lens (white)
G Green Lens
R Red Lens
J Red/Blue Split
 (J in low dome only)



(Strobe Tube 1 Yr.)

(w/ Dust Cover)



3000 195 LB. PULL MAGNETIC MOUNT

6" Dome #3207HM(x)-195
 4" Dome #3207LM(x)-195
 (x)=A, B or R for Amber, Blue or Red

| Tech Specs | 3000 Strobe | 4000 Strobe |
|-----------------|--|---|
| Input Voltage: | 10 - 30 Vdc | |
| Current Draw: | 10 watt: 1 amp @ 12 Vdc, 0.5 amp @ 24 Vdc 20 watt: 2 amps @ 12 Vdc, 1 amp @ 24 Vdc | 20 watt: 2 amps @ 12.8 Vdc, 1 amp @ 24 Vdc |
| Output: | 10 or 20 watt | 20 watt |
| Technology: | Xenon Helix Strobe Tube | |
| Flash Patterns: | 2 Flash Patterns - Double or Quad (user selectable) | |
| Mounting: | Permanent or Magnetic Mount (polycarbonate lens & base) | Permanent or Magnetic Mount (polycarbonate lens & aluminum base) |
| Dimensions: | 4" Dome w/ base: 4.75" (12 cm) H 6" Dome w/ base: 6.7" (17 cm) H x 6.3" (16 cm) Base Diameter | |

6" BRANCH GUARD

#E36ØBG6



6" DUST COVER

#E36ØDC6



Beacon ACCESSORIES

3000, 4000 & 4500 models*

4" Metal Branch Guard #E36ØBG4
 6" Metal Branch Guard #E36ØBG6
 Clear Dust Cover #E36ØDC6

*Not for use with 5000 Series Beacon.

| Tech Specs | 5000 Strobe |
|-----------------|--|
| Input Voltage: | 10 - 30 Vdc |
| Current Draw: | 1.5 amp @ 12 Vdc 0.75 amp @ 24 Vdc |
| Output: | 15 watts |
| Technology: | Xenon "U" Strobe Tube |
| Flash Patterns: | 2 User Selectable Flash Patterns: Double & Quad |
| Mounting: | Permanent Mount only |
| Dimensions: | 5.6" (14 cm) Height x 6.9" (18 cm) Diameter |

5000 SERIES STROBE

Amber Dome #5157LFC
 Clear Dome #5157LFA



Beacons - LED & Strobe, 4", 5" & 6" Dome Heights

1.800.338.7337 / www.soundoffsignal.com




Mini Beacons LED & Strobe

2000 SERIES STROBE MINI

A Amber Lens #2Ø51FA

| Tech Specs | 2000 Series Mini Strobe |
|------------------------|---|
| Input Voltage: | 10 - 72 Vdc |
| Current Draw: | 0.3 amps @ 12 Vdc |
| Output: | Approximately 3 amps |
| Technology: | Linear Strobe Tube |
| Flash Patterns: | 1 Flash Pattern @ 60 - 80 f.p.m. |
| Mounting: | Permanent or Magnetic Mount |
| Dimensions: | 3.6" (9 cm) H 5.1" (13 cm) Base Diameter |

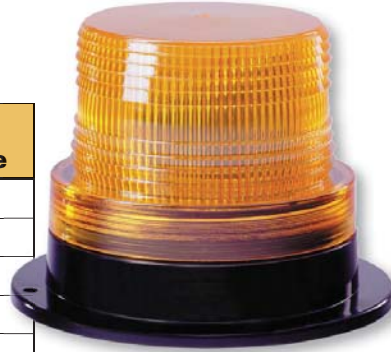

Features

- Compact sized beacons are perfect for smaller equipment like fork lifts & bobcats
- Strobe or LED models available (LED available in 1500 Series only)
- Superior input voltage range allows use in multiple applications
- Polycarbonate lenses with UV inhibitor prevents sun fade
- Molded durable polycarbonate base will not rust & resists cracking
- Self contained, potted power supplies are protected from moisture & vibration

2000 Series Strobe

- Permanent Mount only
- 10 - 72 Vdc
- Linear Strobe Tube technology
- 1 Year Warranty

1000 Series Strobe

- Permanent Mount only
- 12 - 72 Vdc
- Linear Strobe Tube technology
- 1 Year Warranty

1500 Series LED

- Permanent Mount only
- 10 - 80 Vdc
- Gen1 LED Technology
- 2 Year Warranty
- UL safety tested
- CE Mark for European markets - product conforms to legal requirements with respect to safety, health, environment & consumer protection

Mini Beacons LED & Strobe



1500 SERIES LED MINI

A Amber Lens #ELB15BC0AA

| Tech Specs | 1500 Series Mini LED |
|------------------------|--|
| Input Voltage: | 10 - 80 Vdc |
| Current Draw: | 250mA @ 12 Vdc or 40mA @ 80 Vdc |
| Output: | 3 amps maximum |
| Technology: | 6 Gen1 LEDs |
| Flash Patterns: | 1 Flash Pattern @ 60 f.p.m. |
| Mounting: | Permanent Mount |
| Dimensions: | 5.2" (13 cm) H 3.8" (10 cm) Base Diameter |



1000 SERIES STROBE MINI

A Amber Lens #1051FA

| Tech Specs | 1000 Series Mini Strobe |
|------------------------|--|
| Input Voltage: | 12 - 72 Vdc |
| Current Draw: | 0.3 amps @ 12 Vdc |
| Output: | Approximately 3 amps |
| Technology: | Linear Strobe Tube |
| Flash Patterns: | 1 Flash Pattern @ 60 - 80 f.p.m. |
| Mounting: | Permanent Mount |
| Dimensions: | 5.2" (13 cm) H 3.8" (10 cm) Base Diameter |

