

GHOST™

Recess Mount by SoundOff Signal

- **The original GHOST light now in a new recess mount** - light extends less than 1/4" (8 mm) from the body of the vehicle when installed
- **Die cast aluminum housing in your choice of Black, White or Chrome** - Black & White housings are powder coated while the Chrome housing has a high luster, nickel finish
- **Premium optics offer the most power & brightness** increasing safety for emergency workers & civilians alike
- **6 powerful Gen3 LEDs** offer maximum brightness, color consistency & reliability
- **Red Stop/Tail model is a low power, Steady-on Red Running Light.** Once brake is applied light flashes 5 times & remains on at full power while brake is activated
- **Moisture & vibration resistant** for heavy duty & exterior applications
- **Light Sync Technology to synchronize your lights**
- **Includes** Santoprene Rubber Mounting Gasket with 18" of 3-wire Shielded Cable for hard wire installation

Tech Specs	GHOST™ RM
Flash Patterns:	33 Flash Patterns
Light Sync:	Yes
Technology:	6 Gen3 LEDs
Mounting:	Recess Mount - light extends 0.3" (8 mm)
Input Voltage:	10 - 30 Vdc
Current Draw:	0.75 amps (flash pattern dependent)
Dimensions:	Width x Height x Depth 4.7" (14 cm) W x 1.6" (28 mm) H x 1" (46 mm) D
Operating Temp.:	-40° to +65° C / -104° to +149° F



NEW!



Warning Light:


Black Housing: #EGHST5(x)B
 Chrome Housing: #EGHST5(x)C
 White Housing: #EGHST5(x)W

Stop/Tail Light (A, B or R only)

Black Housing: #EGHSTT5(x)B
 Chrome Housing: #EGHSTT5(x)C
 White Housing: #EGHSTT5(x)W



Light includes rubber grommet for mounting.

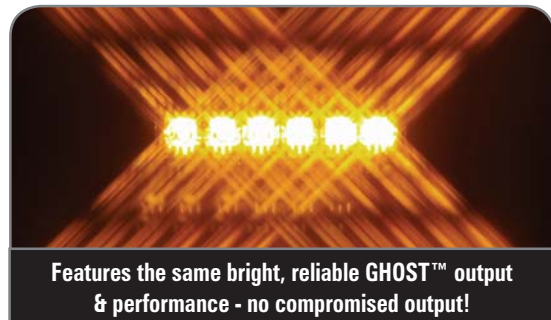

Features the same bright, reliable GHOST™ output & performance - no compromised output!

COLORS

Solid

(x) = **A B G R W**

Dual/Split

(x) = **A B D E F**
G H J K L
M N P R W

Surface Mount - XP 63™ & Recess Mount - GHOST™

1.800.338.7337 / www.soundoffsignal.com

R4 Series 4" Round Warning Light (Gen3 or Gen2 LED)

- **Powerful & bright Gen3 or Gen2 LED models available**
- **Durable, UV resistant polycarbonate lenses** resist fading or yellowing
- **Optional Chrome Dress Ring** (mounts over Rubber Grommet)

R4 Series Gen3 Warning Light

- Clear Lens or Color Lenses in Amber, Blue or Red
- CA Title 13 Compliant
- Features 16 Flash Patterns with Flash Pattern Recall
- Light Sync Technology to synchronize with other lights
- Includes black Rubber Grommet with 18" of 3-wire shielded cable for hard wire installation



R4 Series Gen2 Warning Light

- Clear Lens only
- Features 8 Flash Patterns
- Includes black Rubber Grommet, 3-wire lead with AMP Sure Seal Connector & Mating Harness



Tech Specs	R4 Series Gen3	R4 Series Gen2
Flash Patterns:	16 Flash Patterns	8 Flash Patterns
Light Sync:	Yes	No
Technology:	6 Gen3 LEDs	52 Gen2 LEDs
Input Voltage:	10 - 16 Vdc	
Current Draw:	1 amp @ 12.8 Vdc	0.35 to 0.5 amps @ 12.8 Vdc
Dimensions:	Diameter x Depth	
Light	4" (10 cm) Diam. x 1.25" (3 cm) D	
Grommet	5.2" (13 cm) Diam. x 1.25" (3 cm) D	
Chrome Dress Ring	5.75" (14 cm) Diam. x 0.44" (1 cm) D	
Operating Temp.:	-40° to +65° C / -104° to +149° F	

R4 Series Gen3 Light w/ Grommet

Clear Lens: #ERDREBZ3(x)C
Color Lens: #ERDREBZ3(xx)



Parts & Accessories

Clear Lens Replacement: #PLEDZ3C
Chrome Dress Ring: #ECVR4CHRM
Rubber Grommet: #ECVR4GRMT-BK



COLORS

Clear Lens (x) = **A** **B** **G** **R** **W**

Color Lens

(x) = **AA** **BB** **RR**

R4 Series Gen2 Light w/ Grommet

Clear Lens (only) #ERDREBZ(x)



Parts & Accessories:

Chrome Dress Ring: #ECVR4CHRM
Rubber Grommet: #ECVR4GRMT-BK



COLORS

Solid (x) = **A** **B** **R**

O6 Series 6" Oval Warning Light (Gen2 LED)



O6 Series Gen2 Light w/ Grommet
#EOVBZ(x)

Parts & Accessories

Chrome Dress Ring:
#ECVO6CHRM
(mounts over Rubber Grommet)
Rubber Grommet:
#ECVO6GRMT-BK



- **Best in Class Appearance**
- **Collimating lens design** concentrates light into an intensified pattern of light - no dark spots or voids in light output
- **Self-contained with 8 flash patterns** - no external flasher required
- **Weatherproof design** is great for heavy duty exterior applications
- **Optional Chromed Dress Ring available**
- **Light includes** black Rubber Grommet, Mating Harness & AMP Sure Seal Connector with 3-wire lead



Intense & bright Gen2 LEDs power our O6 Series Warning Light. Amber LED light shown.



A complete line of 6" Oval lights available in Warning & Signal Lights with white Back Up lights available.

Ask to see our
Bus Catalog for all Signal,
Back Up, Marker
& Licence Plate Lights

Tech Specs	O6 Series 6" Oval
Flash Patterns:	8 Flash Patterns
Light Sync:	No
Technology:	57 Gen2 LEDs
Input Voltage:	10 - 16 Vdc
Current Draw:	0.35 to 0.55 amps @ 12.8 Vdc
Dimensions:	Length x Height x Depth
Light	6.4" (16 cm) L x 2.2 (6 mm) H x 1.5" (4 mm) D
Grommet	7.4" (19 cm) L x 3.9" (10 mm) H x 1" D
Chrome Dress Ring	7.4" (19 cm) L x 3.9" (10 mm) H x 0.4" D
Operating Temp.:	-40° to +65° C / -104° to +149° F



Optional Chromed Dress Ring available to complement other vehicle accessories (mating harness shown).



COLORS
Solid
(x) = **A** **R**

1.800.338.7337 / www.soundoffsignal.com

Recess Mounts - 4" Round & 6" Oval Warning Lights

SOUND OFF
Signal