


# UltraLITE



## Interior Windshield Warning Bar

- **Custom Color Configurations** available for the 4 Module Windshield Light (see website for order form)
- **Upgrade to UltraLITE Interior Warning Bars & discover the hidden power of LED3 Mini Lights.** Bright LED3 modules line these versatile warning bars for maximum output & impact
- **2 Mounts available:** Suction Cup Mount (2 or 4 Module Lengths) or Permanent Headliner Mount (8 or 12 Module Lengths)
- **Many vehicle specific brackets available**, see page 23 for more details & photos
- **Offered in 10 Solid or Split Colors LED color combinations** for any market - great warning bars for police, security, volunteer, fire, rescue vehicles & work trucks
- **Single Warning Tips available on the 8 Module bar**
- **Single or Dual Warning Tips available on the 12 Module bar**
- **Compatible with the DAS Switch**, see page 25

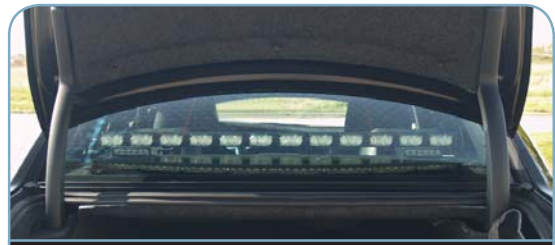

UltraLITE 12 Module Bar shown mounted in the rear window of a 2011 Dodge Charger (with no shroud).



4 Module Suction Cup Mount UltraLITE™ in Red/Blue shown illuminated on a bright day.



4 Module Suction Cup Mount UltraLITE™ shown mounted in the rear window of a Ford Mustang.



Shroud can be removed from light & used with a variety of optional brackets for a custom mount, see pg 23.

Tech Specs	UltraLITE™
Flash Patterns:	2 Module: 33 Flash Patterns 4 Module: 21 Flash Patterns 8 or 12 Module: Solid Color - 20 Arrow & 12 Warning Split Color - 19 Warning
Light Sync:	No
Technology:	Gen3 LEDs 2 Module: 6 / 4 Module: 12 / 8 Module: 24 12 Module: 36
Mounting:	Suction Cup or Permanent Headliner Mount
Input Voltage:	10 - 16 Vdc
Current Draw:	< 1 amp for every 2 modules (2 Mod. < 1, 4 Mod. < 2 amps, etc.) Flash Pattern Dependent
Dimensions:	Length x Height x Depth 2 Module: 7" (18 cm) L 4 Module: 13.25" (34 cm) L 8 Module: 26" (66 cm) L 12 Module: 38.75" (98 cm) L x 1.5" (38 mm) H x 3.6" (91 mm) D
Operating Temp.:	-40° to +60° C / -104° to +140° F

## Parts & Accessories

- Bracket, Univ. "L" - 1 hole #PUL3DGMØ1
- Bracket, Univ. "L", - 2 hole #PUL3DGMØ2
- Bracket, Univ. "L", - 3 hole #PUL3DGMØ3
- Bracket, Univ. "L", - 7 hold #PUL3DGM
- Bracket, Charger #PUL3MØ4
- Bracket, Crown Vic #PUL3MØ1
- Bracket, Durango #PUL3MØ5
- Bracket, Impala #PUL3MØ3
- Bracket, Tahoe #PUL3MØ2
- End Cap #PUL3EC
- Shroud, 2 Module #PUL3WS2
- Shroud, 4 Module #PUL3WSS
- Spacer #PUL3ES
- Suction Cup Mount #PUL3WSM



# UltraLITE



Interior Windshield Warning Bar



Suction Cup Mount

## Suction Cup Mount

**2 Module:** #EL3H02A0+(x)

**4 Module:** #EL3H04A0+(x)

Bars include Shroud, Suction Cup Mount, 12 volt Cigar Plug w/ 11.5' of cord & a pair Universal Brackets for optional permanent headliner mount.

See opposite page for Parts & Accessories.



Cigar Plug

2 Module Light



4 Module Light



Brackets  
& Accessories  
see pg. 23



8 Module Light

## Permanent Headliner Mount

**8 Module:**  
#EL3Z08A00(x)

**12 Module:**  
#EL3Z12A00(x)

Bars include Shrouds (1 shroud per 4 module length), a pair of Universal Permanent Headliner Mount Brackets w/ 14' of shielded cable for hard wire installation.

See opposite page for Parts & Accessories.



Permanent Mount



4 Module Shroud

UltraLITE Interior & Exterior Directional/Warning Bars, see pages 21 - 22

Pinnacle™ Interior Lightbars, see pages 11 - 12

# Predator™ 2 & Predator™ LED Windshield Lights

## • Features

- **Light has a narrow, low profile** which can be mounted above or below the rear view mirror or installed in rear or side windows with optional prisoner screen bracket
- **Customizable shroud is pre-scored** so you can easily cut it to fit your windshield angle to reduce flashback
- **Smooth, clear Lexan polycarbonate lens** is engineered for maximum light output with UV resistant properties to prevent fading or yellowing
- **CA Title 13 compliant models** available (see web or price guide for part numbers & pricing)
- **3 versatile mounting options:** Permanent Headliner Mount, Suction Cup Mount or Prisoner Screen Bracket\* (purchased separately, for single light only, see page 47)
- **Includes Shroud & 12v DC Plug with 11.5' cord length**

## Predator 2™

- Wide, bright Extreme Angle output - our brightest light
- 8 super bright Gen3 LEDs per module
- 10 - 30 Vdc

## Predator™

- Less LEDs but packed with power
- 6 bright Gen3 LEDs per module
- 10 - 16 Vdc

**Brackets & Grommets pg. 47**



Dual Light with Permanent Mount mounted above the rear view mirror in the windshield.



Dual Predator Lights mounted to the rear headliner in the back window of a Ford Explorer.



Single Windshield light mounted with optional Prisoner Screen Bracket (windshield shroud removed).

Tech Specs	Predator 2™	Predator™
Flash Patterns:	33	
Light Sync:	No	
Technology:	Single: 8 Gen3 LEDs Dual: 16 Gen3 LEDs	Single: 6 Gen3 LEDs Dual: 12 Gen3 LEDs
Mounting:	Surface Mount on 2.77" (70 mm) centers	
Input Voltage:	10 - 30 Vdc	10 - 16 Vdc
Current Draw:	Single: 1.1 amps max. Dual: 2 amps max. (flash pattern dependent)	
Dimensions:	Length x Height x Depth Single: 3.8" (10 cm) L, Dual: 7.3" (19 mm) L, x 1.9" (48 mm) H x 6.9" (18 cm) D	
Operating Temp.:	-20° to +65° C / -68° to +149° F	

## Parts & Accessories

- #PPRPSBKT Prisoner Screen Mount Bracket
- #PPRDWBRKT Suction Cup Mount
- #PPRDWSSWS Shroud, Single
- #PPRDWSDWS Shroud, Dual

## COLORS Solid

(x) = **A B G R W**

## Dual/Split

(x) = **A B D E F  
G H J K L  
M N P R W**



# PREDATOR II

**EXPLOSIVE POWER. EXTREME ANGLE.**



## Predator 2™

### Single Light:

- #EP2SWSA+(x) Permanent Mount
- #EP2SWS+(x) Suction Cup Mount

### Dual Light:

- #EP2DWSA+(x) Permanent Mount
- #EP2DWS+(x) Suction Cup Mount



All models available with CA Title 13 Compliant Flash Patterns,  
See Web or Price Guide for Part Numbers.



# PREDATOR™

by SoundOff Signal



## Predator™

### Single Light:

- #EPRDWSA+(x) Permanent Mount
- #EPRDWS+(x) Suction Cup Mount

### Dual Light:

- #EPRDDWSA+(x) Permanent Mount
- #EPRDDWS+(x) Suction Cup Mount



Surface Mounts also available, see pages 39 - 42  
Dash/Deck/Grille Lights also available, see pages 55 -56

Windshield Lights - Predator 2™ & Predator™

1.800.338.7337 / www.soundoffsignal.com





**Single Light:**  
#EPLTWS+(x)  
**Dual Light:**  
#EPLTDWS+(x)

- **Our Pilot™ Windshield lights are low cost, high power** windshield lights designed for volunteer, security & first responders
- **Powerful & bright Gen3 LEDs**
- **“Split” Single light flashes 4 diodes at a time** on each side of the light in a variety of eye-catching patterns
- **Dual light has unique “x-patterns”** which flash the upper 3 diodes of one quadrant against lower 3 diodes of the opposite quadrant, rotating through an “x-pattern” sequence
- **Adjustable height & tilt** allows for a tight fit against any windshield
- **Conveniently located rear switch** allows easy On/Off & pattern switching
- **Flash Pattern Recall remembers last flash pattern used**
- **Made with a durable aluminum housing**
- **Durable UV resistant polycarbonate lens & end caps**
- **Includes suction cup mount, shroud & 12 volt DC plug with 11.5’ cord length**



Dual light offers unique, attention grabbing “X Patterns” as demonstrated by this photo.



Lights include Suction Cup Mount with adjustable brackets & 11.5’ cord with 12v cigar plug (single shown)



Light has convenient, quick access rear switch for Flash Pattern change & powering on or off.

Tech Specs	Pilot™
Flash Patterns:	16
Light Sync:	No
Technology:	Single: 8 Gen3 LEDs Dual: 12 Gen3 LEDs
Mounting:	Suction Cup Mount
Input Voltage:	10 - 16 Vdc
Current Draw:	Single: 0.6 amps Dual: 1 amp
Dimensions:	Length x Height x Depth Single: 4.2" (11 cm) L, Dual: 7.2" (18 cm) x 2.2" (56 mm) H x 5.2" (13 cm) D
Operating Temp.:	-40° to +65° C / -104° to +149° F

### COLORS Solid

(x) = **A B G R W**

### Dual/Split

(x) = **A B D E F**  
**G H J K L**  
**M N P R W**

