


1400 Lumen LED Worklight

#EWLC1400TBDS0W (Spot)


#EWLC1400TBDF0W (Flood)

#EWLC1400TBDT0W (Trapezoid)

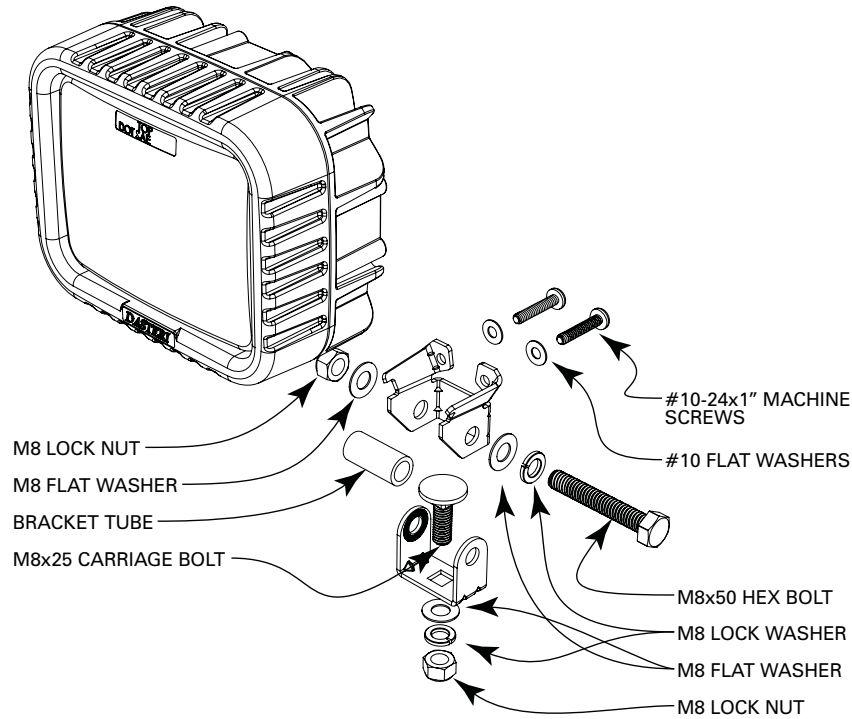

ELECTRICAL CONNECTIONS:

See diagram below for required electrical connections. Connect the RED wire to +10-50 Vdc through a customer supplied 5A fuse and switch. Connect the BLACK wire to a reliable ground.

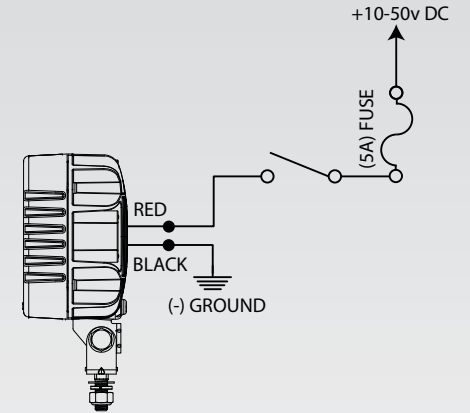

MECHANICAL ATTACHMENT:

Assemble Mounting bracket as shown in the diagram to the left. All bolts should be torqued to a maximum of 25 in-lbs.

⚠ WARNING

This product contains high intensity LED devices. To prevent eye damage, DO NOT stare into the light beam at close range.

TECHNICAL SPECIFICATIONS

Overall Dimensions:	5.56"H x 5.17"W x 2.63"D
Input Voltage Range:	10-50Vdc
Current Draw:	3.0 Amps @ 12.8 Vdc, 1.5 Amps @ 25.6 Vdc, 0.8 Amps @ 51.2 Vdc
Wattage:	38 Watts
Reverse Polarity:	Protected
Load Dump:	Protected
Operating Temperature:	-40° to +65° C
Optical Distribution:	Spot: 10°, Flood: 40° H x 25° V, Trapezoid: 40° H x 15° V
Color Temperature:	5700 K

**SoundOff
Signal**

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product please visit our website at www.soundoffsignal.com and select the "Warranty & Returns" link along the left column of our home page. If you have questions regarding this product please contact Technical Services, Monday - Friday, 8 am to 6 pm at 1.800.338.7337, press #4 to skip the automated message. Questions or comments that do not require immediate attention may be emailed to techsupport@soundoffsignal.com.

1.800.338.7337. / www.soundoffsignal.com / Thank you for trusting us with your safety!